
https://www.uni-luce.ru
+39 339 505 5880
info@uni-luce.com

Via Monselice, 26, 20832 Desio
MB, Italy

ORA L +



| | |
|---|---|
| Available colors: | ○ 547-W29<br>● 547-B29<br>● 547-G29 |
| Beam angle: | 33° 45° |
| LED Color: | 2700K 3000K 4000K |
| LED power: | 25,7W |
| System Power: | 28,5W, 700mA |
| CRI: | 90 |
| Lumen output: | 2980lm |
| Material: | aluminium |
| Location: | Interior |
| Fixation: | Ceiling |
| Installation: | Recessed |
| Product dimension: | 125x125x122mm |
| Cut hole size: | 114x114mm |
| Input: | 220-240V 50\60Hz |
| IP: | 54 |
| Class: | I |
| DIM Option: | ON/OFF DALI TRIAC DTW |

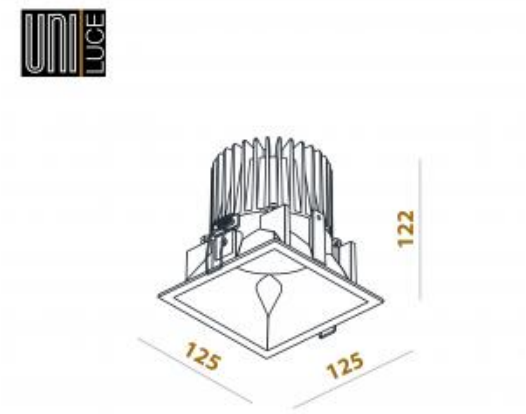

https://www.uni-luce.ru
+39 339 505 5880
info@uni-luce.com

Via Monselice, 26, 20832 Desio
MB, Italy

ORA is more than just a downlight, it’s a real product family. Thanks to IP54 rate, ORA  can be used for both indoor and outdoor application. Both trim and trimless series are available for choice